


# UL Approved

## UL Cables UL Style - 1007

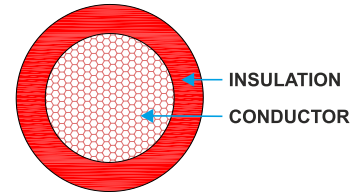

### Application

These cables are used for internal wiring of switchboards, electronic and electrical equipment, machinery, industrial applications.

### Properties

Conditionally resistant to oils, solvents, acids and dyes.  
PVC self-extinguishing and flame retardant, test method to UL VW-1 and CSA FT 1 / FT 2

### Construction

- Annealed plain or tinned stranded copper conductor.
- PVC - core insulation according to UL - standard 1581

### Technical Parameter

- Standard : UL - Std. 758, CSA C 22.2 No. 210
- Nominal voltage : 300V
- Test voltage : 2000V
- Test voltage (Spark test)  
AWG 26-20 : 4kV, AWG 10 -18 : 5kV
- Temperature range : Flexible -5°C to +80°C.  
Fixed installation -20°C to + 80°C CSA - AWM I A/B
- Bending radius :Flexing 10 x cable ø. Fixed installation 5 x cable ø



0701 - UL Approved

Cable Technical Parameters

Part No.	AWG No.	No. of Cores & Nominal Cross Sectional Area	Approx. Cable Diameter	Approx Cable Weight
		Sq. mm	mm	kg/km
0701T2601	26	1 x 0.14	1.3	3.0
0701T2401	24	1 x 0.21	1.5	4.3
0701T2201	22	1 x 0.33	1.6	5.8
0701T2001	20	1 x 0.52	1.9	8.0
0701T1801	18	1 x 0.82	2.2	12
0701T1601	16	1 x 1.32	2.5	18.4

